



ENQUIRIES
info@drenched.ltd.uk
www.drenched.ltd.uk

PRODUCT CODE
DFMR05.25

TECHNICAL DATA SHEET

Drenched Dual Flo


FEATURES

- Water saving 0.25 l/min volumised flow rate
- Switch from stream to volumised spray with a simple twist
- Volumised stream reduces spray and splash
- Domed inlet screen for maximum volumiser life
- 360° Swivel spray head
- Pressure angle compensation for an even volumised spray
- Conforms to WRAS, NSF, KTW, W270
- Lead free

BENEFITS

- Saves 98% water compared to an 'A' rated aerator in volumised mode
- Saves 100% energy as the volumised water does not need heating
- Cold water supply does not feel cold when volumised
- Simple to fit

FLOW RATE

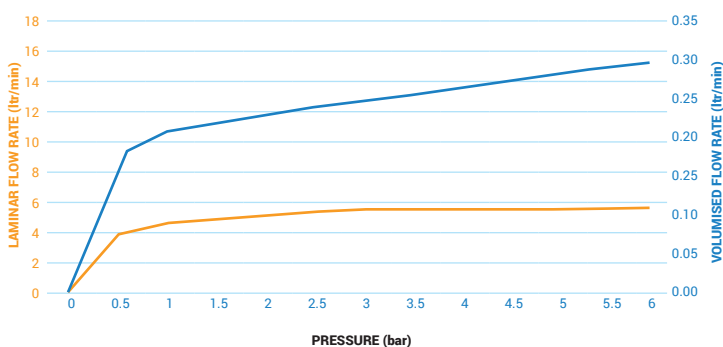

KEY FACTS

Pressure range
1 bar - 6bar

Operating medium
Drinking water

Volumised flow rate @ 3 bar
0.25 +-0,05 L/min

Colour
Chrome

Fitting size
Compatible with std M22 male thread. Other adapters available


Material
POM

Product stability
5°C-65°C

Disclaimer
The Dual flow is designed to be used with hot and cold water. The volumised spray is ONLY to be used with cold water and is not to be used on temperatures above 20 deg C.

— SAVES 98% WATER • SAVES MONEY • SAVES ENERGY —

DIMENSIONS

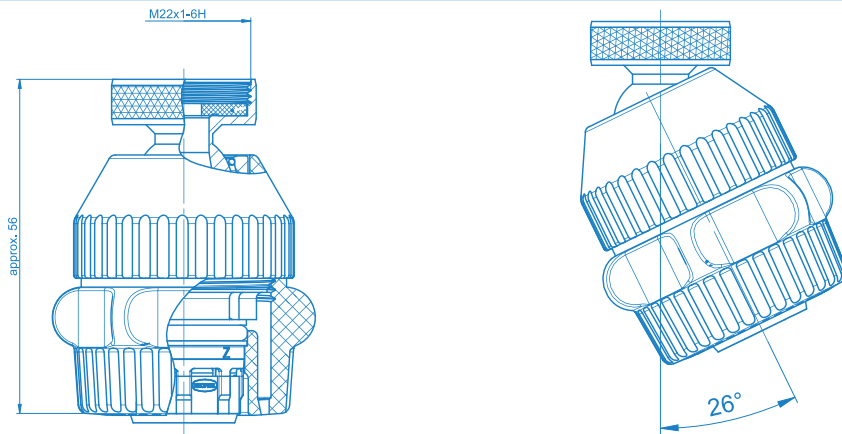

Atomizer-STD-IT Single Jet. Dimensions are according to EN246

VOLUMISED STREAM



APPLICATION AREAS




Drinking water only



Hand Wash




Kitchen Faucet




Not suitable for pressureless water heaters

VOLUMISED OPERATING CONDITIONS



Continuous



Continuous


EASY INSTALLATION TO FIT COMMON HOUSINGS

- 1 Remove old aerator from faucet. Use wrench if necessary.
- 2 Remove any old washers that might be caught inside the spout.
- 3 Clean the threads inside the spout by hand.
- 4 For faucets with outside threads, unscrew adapter from spray. For faucets with inside threads, keep adapter in place. Install onto spout by hand.
- 5 Turn on Faucet. If leak occurs, tighten more firmly.

For female and male faucets with internal and external threads

Male: Remove Top washer and adapter

Female: Leave adapter and top washer in place

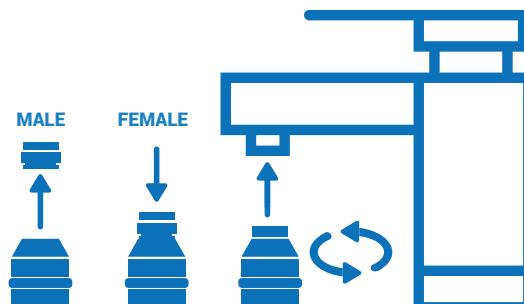

Drenched®

Unit 2
Buccaneer Drive
Doncaster Int'l Business Park
Doncaster
DN9 3QR
United Kingdom

info@drenched.ltd.uk
+44 (0)1302 791 860

PRODUCT CODE
DFMR05.25

— SAVES 98% WATER • SAVES MONEY • SAVES ENERGY —